


CABseal clean

The splittable cable entry system for pre-assembled cables



CABseal clean enables the safe entry of pre-assembled cables into control cabinets, enclosures, and machines. The system was developed specifically for hygiene-critical applications and bridges the gap between standard cable entries and complex, fully hygienic solutions; it is ideal for production areas without direct product contact.

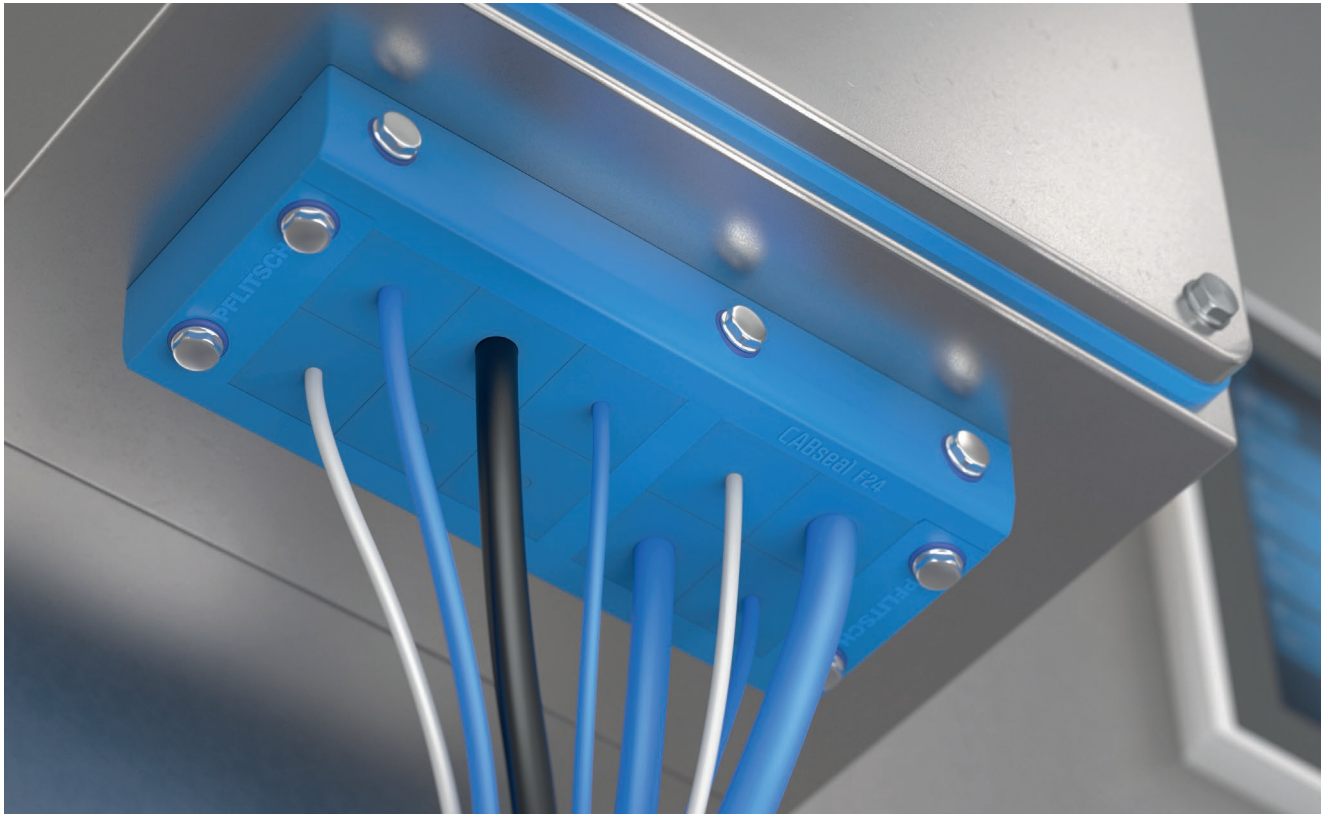

Your benefits at a glance

- » Cost-effective hygiene solution without the complexity of fully hygienic system
- » Easy to clean thanks to a hygienic design based on EHEDG guidelines
- » Four modular frame sizes – flexibly configurable for any application
- » Resistant to standard cleaning agents
- » High-visibility blue color for optimal visual inspection
- » High product safety thanks to FDA-compliant materials, Ecolab-certified material compatibility and Fraunhofer cleanroom listing
- » Easy assembly without special tools

The modular CABseal cable entry system

Custom assembly – precisely tailored to your application


For demanding hygiene applications, three coordinated versions are available: from the frame with standard stainless steel screws, to the version with hygiene screws, to the complete solution with hygiene screws and a mounting kit for the highest standards of cleanability and hygienic design. Take advantage of the proven benefits of the CABseal system: maximum flexibility in configuring grommets and plugs, reliable sealing, and consistently easy installation.



Product features


- » Integrated frame seal (rear)
- » Frame sizes with 4, 6, 8, or 10 grommet fields
- » Dust-tight and protected against water jets (IP 65/66)
- » Temperature-resistant from -40°C to +100°C
- » Material: PA6, FDA-compliant

CABseal clean frame with standard stainless steel screws




Art. no.	Breakout size	Width	Height	Depth	
	mm	B mm	H mm	T mm	
CABc F 4	46 x 36-54	72.8	61.0	20.0	10
CABc F10	65 x 36-54	96.5	61.0	20.0	10
CABc F16	86 x 36-54	116.5	61.0	20.0	10
CABc F24	112 x 36-54	143.5	61.0	20.0	10

CABseal clean frame including hygiene screws / AISI 316L




Art. no.	Breakout size	Width	Height	Depth	
	mm	B mm	H mm	T mm	
CABc F 4.2H	46 x 36-54	72.8	61.0	20.0	10
CABc F10.2H	65 x 36-54	96.5	61.0	20.0	10
CABc F16.2H	86 x 36-54	116.5	61.0	20.0	10
CABc F24.3H	112 x 36-54	143.5	61.0	20.0	10

CABseal clean frame including hygiene screws and mounting kit / AISI 316L



Art. no.	Breakout size	Width	Height	Depth	
	mm	B mm	H mm	T mm	
CABc F 4.6H	46 x 36-54	72.8	61.0	20.0	10
CABc F10.6H	65 x 36-54	96.5	61.0	20.0	10
CABc F16.6H	86 x 36-54	116.5	61.0	20.0	10
CABc F24.7H	112 x 36-54	143.5	61.0	20.0	10

Cable grommets for cable entry

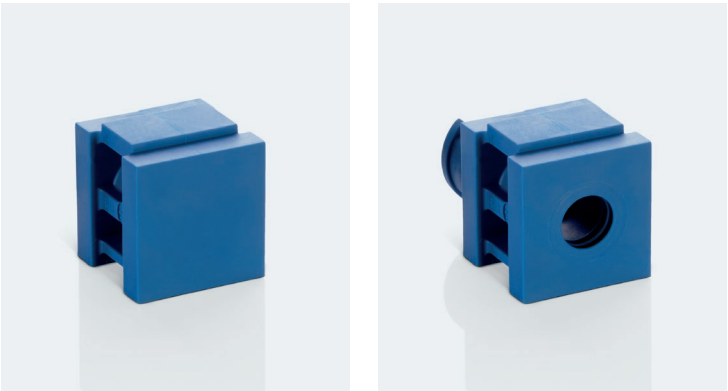



Product features

- » For cable diameters from 3 to 16 mm
- » Dust-tight and protected against water jets (IP 66)
- » Temperature-resistant from -40°C to +100°C
- » Material: TPE, FDA-compliant

Art. no.	Sealing range		
	max./min. ø	mm	
CABc GS 0			20
CABc GS 4	4.0 – 3.0		20
CABc GS 5	5.0 – 4.0		20
CABc GS 6	6.0 – 5.0		20
CABc GS 7	7.0 – 6.0		20
CABc GS 8	8.0 – 7.0		20
CABc GS 9	9.0 – 8.0		20
CABc GS10	10.0 – 9.0		20
CABc GS11	11.0 – 10.0		20
CABc GS12	12.0 – 11.0		20
CABc GS13	13.0 – 12.0		20
CABc GS14	14.0 – 13.0		20
CABc GS15	15.0 – 14.0		20
CABc GS16	16.0 – 15.0		20

Blind plugs for cable grommets





Product features

- » For diameters from 4 to 16 mm
- » Securely seals unused openings (IP 66)
- » Temperature-resistant from -40°C to +100°C
- » Material: PA6, FDA-compliant

Art. no.	Diameter	Suitable for grommets	
	Ø d mm		
CABc PL 4	4	GS 4 & GS 5	20
CABc PL 5	5	GS 2/5 & GS 4/5	20
CABc PL 6	6	GS 6 & GS 7	20
CABc PL 7	7	GS 2/7	20
CABc PL 8	8	GS 8 & GS 9	20
CABc PL10	10	GS10 & GS11	20
CABc PL12	12	GS12 & GS13	20
CABc PL14	14	GS14 & GS15	20
CABc PL16	16	GS16	20

PFLITSCH GmbH & Co. KG

Ernst-Pflitsch-Straße 1 · 42499 Hückeswagen · Germany

T +49 2192 911-0 · info@pflitsch.de · www.pflitsch.de

Subject to technical modifications without notice. Errors excepted.

Some of the product names used in this brochure are registered trademarks. You can find an overview of the trademarks owned by PFLITSCH GmbH & Co. KG and that apply at least within Germany at www.pflitsch.de/en/imprint.

All previous and older versions shall cease to be valid upon publication of this brochure. We invite anyone interested in our products to contact us. Should you do so via the communication channels cited in this brochure and on our website, such as our telephone number or e-mail address, we ask you to take note of our declaration on data protection under the header "Privacy Policy" on our website www.pflitsch.de/en.

Flyer CABseal clean EN | 07.2026 | 168043 | 168091+