# DES 24-90

**Splittable frame for cables with and without connectors**

## FEATURES

- 90° cable entry
- Multiple configurations in the same frame
- Frame screws in AISI304 Stainless Steel
- IP54
- Strain relief according to EN 62444
- Sturdy construction IK10
- Max 40 cables




The 90° cable entry system DES-90 is used when the machinery construction does not allow the straight cables entrance, or when a clean design is requested.
This cable entry system is suitable for both cables with or without connectors and corrugated conduits, or a mix of them.
The grommets can be freely accommodated into the frame.


**Material:** PP+GF, halogen-free, silicone-free
**Flammability:** self-extinguishing acc. to UL94-V0
**Temperature:** -40°C... +155°C (static)

## RELATED PRODUCTS


- SPP grommets (from page 65)
- SPG grommets (from page 71)
- DES Cover (page 36)
- HY360 hydraulic punch driver (page 179)





| Model | Code | Some possible configurations | Cut-out (mm) | Pcs (/pack) |
|---|---|---|---|---|
| **DES 24-90** | 1731010124 |  | 112 x 36 | 1 |

**Dimensions** (mm)

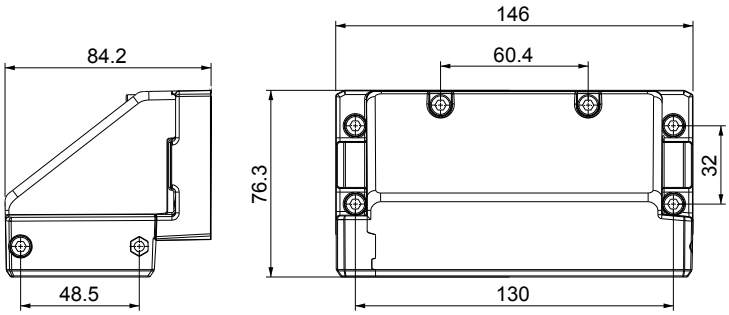


IP54 | NEMA 12 | UL TYPE 12 | HL3 EN 45545-2 | ECOLAB | UL94-V0 | UV ISO 4892-2A | RoHS COMPLIANT | IK10

DETASULTRA

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**