

blueglobe with multiple inlet – Plastic

Polyamide, colours: grey (RAL 7035), black (RAL 9011)

Metric connection thread according to EN 60423


Without connection thread sealing ring

Type of protection IP 68 up to 15 bar, IP 69

Strain relief up to class B, EN 62444


CE RoHS

[Request sample](#)

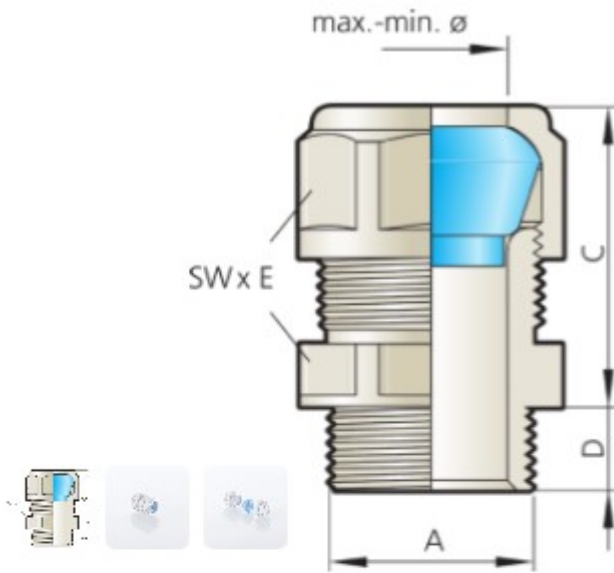

Material gland body	Version/colour	Material sealing insert	Colour	Temperature range (min./max.)
PA 6.6	Grey	TPE	Blue	-20 °C / +120 °C

Art. No.	Amount		Connection thread/length		Sealing range	Sealing range without inlet	Sealing range with 1 inlet	Sealing range with 2 inlets	Sealing range with 3 inlets	Spanner width
			A	D mm	max./min. dia. mm	max./min. dia. mm	max./min. dia. mm	max./min. dia. mm	max./min. dia. mm	SW x E mm
bg 225PA.3	1		M25x1.5	9.0	20.0 – 6.0	20.0 – 15.0	15.0 – 11.0	11.0 – 8.0	8.0 – 6.0	30x33
bg 225PA.3g	1		M25x1.5	9.0	20.0 – 6.0	20.0 – 15.0	15.0 – 11.0	11.0 – 8.0	8.0 – 6.0	30x33
bg 232PA.3	1		M32x1.5	11.0	25.0 – 11.0	25.0 – 19.0	19.0 – 15.0	15.0 – 12.0	12.0 – 11.0	36x39.5
bg 232PA.3g	1		M32x1.5	11.0	25.0 – 11.0	25.0 – 19.0	19.0 – 15.0	15.0 – 12.0	12.0 – 11.0	36x39.5



50 NotG **CE**

50 NotG **CE**

25 NotG **CE**

25 NotG **CE**