

blueglobe TRI CLEAN Plus

Outer parts stainless steel AISI 316L, inner parts stainless steel AISI 303

Including 2 washers


Metric connection thread according to EN 60423

Type of protection IP 68 up to 15 bar, IP 69



RoHS

[Request sample](#)

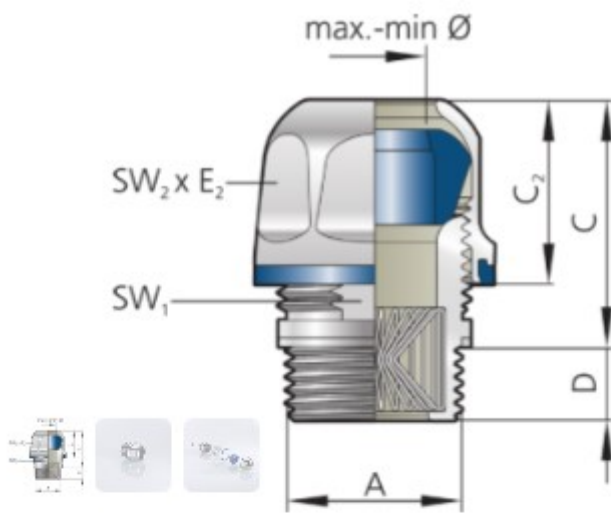

Material gland body	Version/colour	Material sealing insert	Colour	Temperature range (min./max.)
AISI 316L	Blank	TPU	Gentian blue	-40 °C / +85 °C

Art. No.	Amount		Connection thread/length		Sealing range max./min. dia. mm	Screening range max./min. dia. mm	Passage max. G mm	Mounting height C mm	Mounting height C2 mm	Spanner width SW1/SW2 x E2 mm		Conformity
			A	D mm								
bg 212VA tri cp	1		M12x1.5	7.0	7.0 – 5.0	5.0 – 3.0	5.2	19.0	15.0	10/17x19.4	5	RoHS CE
bg 216VA tri cp	1		M16x1.5	9.0	9.0 – 7.0	9.0 – 5.0	9.3	21.0	18.0	14/20x23.4	5	RoHS CE
bg 220VA tri cp	1		M20x1.5	9.0	12.0 – 9.0	12.0 – 7.0	12.3	27.0	21.0	19/24x27.4	5	RoHS CE
bg 225VA15 tri cp	1		M25x1.5	11.0	15.0 – 12.0	14.0 – 10.0	17.3	27.0	23.0	24/30x33.4	5	RoHS CE
bg 225VA tri cp	1		M25x1.5	11.0	18.0 – 15.0	16.0 – 10.0	17.3	27.0	23.0	24/30x33.4	5	RoHS CE
bg 232VA21 tri cp	1		M32x1.5	12.0	21.0 – 18.0	20.0 – 13.0	21.3	27.0	24.0	30/36x39.4	5	RoHS CE
bg 232VA tri cp	1		M32x1.5	12.0	23.0 – 20.0	20.0 – 13.0	21.3	27.0	24.0	30/36x39.4	5	RoHS CE
bg 240VA26 tri cp	1		M40x1.5	22.5	26.0 – 23.0	28.0 – 20.0	28.5	32.0	28.0	36/45x48.4	4	RoHS CE
bg 240VA tri cp	1		M40x1.5	22.5	29.0 – 26.0	28.0 – 20.0	28.5	32.0	28.0	36/45x48.4	4	RoHS CE

