


Cable carrier configuration

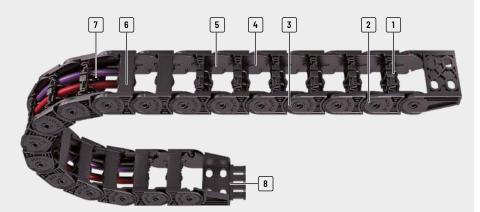

- 1 Sturdy 2-component design: solid chain body, flexible film hinge
- 2 Plastic chain links
- 3 Extensive unsupported lenath
- 4 Inside space is gentle on the cables - no interfering edges
- 5 Very quiet through integrated noise damping
- 6 Inside or outside openable
- 7 Dividers for cable separation
- 8 Single-part end connectors with integratable strain relief

Features

- » Very fast cable laying by simply pressing in the cables
- » Very high fill level through lateral swivelling of the lamella - lamellae do not swivel into the cable space
- » Each chain link consists of two different materials:
 - Hard chain body made of glass-fibre reinforced material
 - Lamellae with flexible film hinge made of special elastic plastic

- » Sturdy cable carrier design
- » High torsional rigidity
- » Extensive unsupported length
- » Very quiet through integrated noise damping

























Fast and easy installation of cables



Very high fill level



High side stability



Divider systems for reliable cable separation

Cable carrier configuration

Configuration guidelines

MON0 series

EasyTrax® series | Overview

Cable carrier design

Solid plastic cable carriers: chain links and end connectors made of plastic

Each chain link consists of two different materials:

- » Hard cable carrier body made of glass fiber-reinforced material
- » Flexible lamellae made of elastic plastic



The two-component technology

The two-component technology of the EasyTrax® combines two seemingly incompatible features: stability and flexibi-

Cable carriers need to be extremely sturdy, with extensive unsupported length. At the same time, cables need to be inserted easily for fast cable laying. The EasyTrax® meets


these requirements thanks to its innovative design and material combination of a hard cable carrier body made from fiber glass reinforced material and lamellae made of elastic plastic.





UNIFLEX Advanced series

TKK series

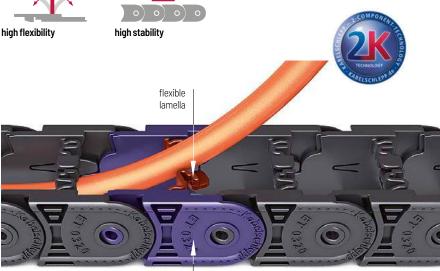


hard chain link of fiber glass reinforced material

EasyTrax® series | Comparison Test


Comparison of dimensions

Manufacturer	h i [mm]	h_G [mm]	t [mm]	Identical connection hole pattern
ET0320	18	25.5	32	yes
Competitive product	19	25	30.5	yes

Comparison of bending moment




Comparison of bending strength



Load diagram

for unsupported length depending on additional load

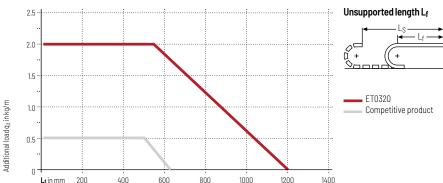

Advantages over competitive product

- » 4 times bigger additional load compared to competitive product
- » Double unsupported length compared to competitive product
- » Faster cable laying at a higher utilization faktor
- » Low noise operation due to internal damping system
- » High side stability through locking in the stroke system
- » Dividers can be used for cable separation

EasyTrax® series | Overview

Cable carrier

Cable carrier configuration

Configuration guidelines

Materials information

MON0 series

QuickTrax[®] series

UNIFLEX Advanced series

> TKP35 series

> TKK series

Туре	Opening variant	Stay variant	h _i [mm]	h _G [mm]	B _i [mm]	B_k [mm]	B _i - grid [mm] Xmm ₩	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d _{max} [mm]
ET0115		040	4.6	8	7	11	_	11.5	10	0.4	3.5

ET0250										
	030	16.5	23	30 - 50	60	-	25	28 - 100	4	13
	040	16.5	23	30 - 50	60	-	25	28 - 100	4	13
<u>ું</u>										
ET0700										

L10020										
	030	18	25.5	15 – 65	27 - 77	-	32	28 - 125	1.2	14
	040	18	25.5	15 - 65	27 - 77	-	32	28 - 125	1.2	14
Us @ HUS @ HU										

E I 1455										
	030	25	36	25 - 78	94	-	45.5	52 - 200	6	20
	040	25	36	25 - 78	94	-	45.5	52 - 200	6	20

EasyTrax® series | Overview

Unsuppo	rted arrai	ngement	Glidin	g arrange	ment	I	nner Dis	tributio	n	M	oveme	nt	Page		
Travel length ≤ [m]	v _{max} ≤[m/s]	a_{max} ≤ [m/s ²]	Travel length ≤ [m]	V _{max} ≤[m/s]	$\mathbf{a_{max}} \leq [\mathbf{m/s^2}]$	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	a.		cable calller
			C		(Sa)			H	H	Ver	₹				_
														carrier	ration
0.68	3	10	-	-	-	-	-	-	-	•	-	-	242	Cable carrier	configuration
														Configuration	uidelines
														3	0
1.6	10	50	60	3	30	•	-	-	-	•	-	•	246		_
1.6	10	50	-	-	-	•	-	-	-	•	-	•	247	Materials	ormation
														Σ	ju.
2.90	10	50	80	2.5	25	•	-	-	-	•	-	•	252	MONO	series
2.90	10	50	-	-	-	•	-	-	-	•	-	•	253		
														.ax®	S
														QuickTrax®	serie
4.80	10	50	-	-	-	-	-	-	-	•	-	•	258		
4.80	10	50	-	-	-	-	-	-	-	•	-	•	259	EX	nan
														UNIFLEX	HUVal

EasyTrax®

TKP35 series

TKK series

ET0115



Pitch 11.5 mm



Inner height 4.6 mm



Inner width 7 mm



Bending radius 10 mm

Stay variants



Design 040.....page **242**

Frame with lamellae in the inner radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Swivelling at any position on one side.
- » Inside: swivelling.



TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source - with a warranty certificate on request! Learn more at tsubaki-kabelschlepp.com/totaltrax




TRAXLINE® cables for cable carriers

Hi-flex electric cables which were specially developed, optimised and tested for use in cable carriers can be found at

tsubaki-kabelschlepp.com/traxline.

ET0115 | Installation dim. | Unsupported


Unsupported arrangement



KR	Н	Hz	L _B	U_{B}
[mm]	[mm]	[mm]	[mm]	[mm]
10	28	38	54.5	_ ZJ.J

Load diagram for unsupported length depending on the additional load.

Intrinsic cable carrier weight $q_k\!=\!0.044\,kg/m$ with $B_17\,mm$. For other inner widths, the maximum additional load changes.

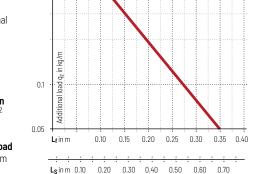



Speed up to 3 m/s







Additional product information online



Subject to change without notice.

Installation instructions, etc.: Additional info via your smartphone or check online at

tsubaki-kabelschlepp.com/ downloads



Configure your cable carrier here: online-engineer.de

ET0115.040 | Dimensions · Technical data

Stay variant 040 – with lamella in the inner radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Can be swivelled at any position on one side.
- » Inside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



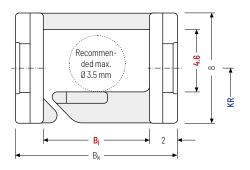

The maximum cable diameter strongly depends on the bending radius and the desired cable type.
Please contact us.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h i	h _G	B_i	B_k	KR	q k
[mm]	[mm]	[mm]	[mm]	[mm]	[kg/m]
4.6	8	7	B _i + 4	10	0.044

Order example



Cable carrier

Cable carrier configuration

Configuration guidelines

Materials information

MUNU

uickTrax® series

UNIFLEX Advanced series


> TKP35 series

TKK

ET0115 | End connectors

End connector - plastic


The plastic end connectors can be connected from above or below.



2.9 $B_{EF} = B_i + 4$ 5.8 -- 4 --

▲ Assembly options

The end connectors can be swivelled in the KR direction.



Connection point


F - fixed point

M - driver

Connection type

A - threaded joint outside (standard)

Order example



ET0250



Pitch 25 mm



Inner height 16.5 mm



Inner widths 30 – 50 mm



Bending radii 28 - 100 mm

Stay variants



Design 030.....page **246**

Frame with lamellae in the outer radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Outside: swivelling.



Design 040......page **247**

Frame with lamellae in the inner radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Inside: swivelling.



UNIFLEX Advanced

For a non-opening cable carrier with 17.5 mm inner height we recommend the series UNIFLEX Advanced

UA1250 from page 150.

Cable carrier configuration

Configuration guidelines

Materials information

QuickTrax® series


UNIFLEX Advanced series

TKP35 series

TKK series

ET0250 | Installation dim. | Unsupported · Gliding


Unsupported arrangement



KR	Н.	Hz	LB	UB
[mm]	[mm]	[mm]	[mm]	[mm]
28	79	104	138	65
38	99	124	169	75
45	113	138	191	82
60	143	168	238	97
75	173	198	286	112
100	223	248	364	137

Load diagram for unsupported length depending on the additional load.

Intrinsic cable carrier weight $q_k = 0.36 \text{ kg/m}$ with B_i 50 mm. For other inner widths, the maximum additional load changes.





Speed up to 10 m/s








Travel length up to 1.6 m



Additional load up to 4 ka/m

Gliding arrangement





Speed up to 3 m/s



The gliding cable carrier must be guided in a channel. See p. 844.

Travel length up to 60 m



Only design 030 can be used for a gliding arrangement.

ET0250.030 | Dimensions · Technical data

Stay variant 030 – with lamellae in the outer radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Outside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



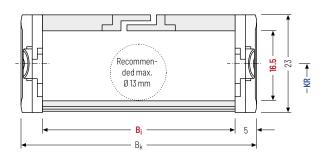

The maximum cable diameter strongly depends on the bending radius and the desired cable type.
Please contact us.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h _i [mm]	h _G [mm]	B i [mm]	B_k [mm]			[1	KR mm	1]			q k [kg/m]
16.5	23	30 50	B _i + 10	28	38	40		OU	75	100	0.32 - 0.36

Order example



Cable carrier configuration

Configuration guidelines

Materials information

MUNU

uickTrax® series

UNIFLEX Advanced series

> TKP35 series

TKK

ET0250.040 | Dimensions · Technical data

Stay variant 040 - with lamellae in the inner radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Inside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



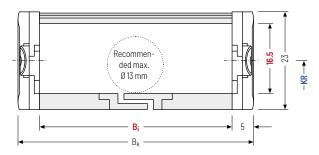

- The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.
- Design 040 is not suitable for gliding arrangements.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length Lk rounded to pitch t

h _i [mm]	h _G [mm]	[B _i mn	ո]	B _k [mm]			[KR mm]			q k [kg/m]	
 16.5	 23	30		50	B _i + 10	28	38	45		60	75	 100	0.32 - 0.36	

Order example



Subject to change without notice.

Cable carrier configuration

Configuration guidelines

ET0250 | Inner distribution | TS0

Divider systems

The divider system is mounted on every 2nd chain link as a standard.


As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (version A).

For applications with lateral accelerations and applications with the cable carrier rotated by 90°, the dividers can easily be fixed on the stay through rotation.

The arresting cams snap into the catch profiles in the covers (version B).

Divider system TSO without height separation

Vers.	a _{T min} [mm]	$\begin{array}{c} \textbf{a}_{\text{x min}} \\ [\text{mm}] \end{array}$	a _{c min} [mm]	a _{x grid} [mm]	n T min
Α	3	6	4	-	-
В	3	6	4	2	-
		•	•		•



Order example



Please state the designation of the divider system (TSO), the version, and the number of dividers per cross section [n_T]. You are welcome to add a sketch to your order.

Additional product information online



Installation instructions, etc.: Additional info via your smartphone or check online at

tsubaki-kabelschlepp.com/ downloads




Configure your cable carrier here: online-engineer.de


TKK series


UNIFLEX Advanced series


Single-part end connectors - plastic (with integrated strain relief)

The plastic end connectors can be connected **from above or below**. The connection type can be changed by altering the position of the end connector.










▲ Assembly options

B i [mm]	B EF [mm]	n _z
30	40	2
50	60	4



Connection point

F - fixed point

M - driver

Connection type


A - threaded joint outside (standard)

- threaded joint inside

H - threaded joint, rotated 90° to the outside

K - threaded joint, rotated 90° to the inside

Order example



ET0320



Pitch 32 mm



Inner height 18 mm



Inner widths 15 - 65 mm



Bending radii 28 - 125 mm

Stay variants



Design 030 page **252**

Frame with lamellae in the outer radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Outside: swivelling.



Design 040 page **253**

Frame with lamellae in the inner radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Inside: swivelling.



TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source - with a warranty certificate on request! Learn more at tsubaki-kabelschlepp.com/totaltrax



TRAXLINE® cables for cable carriers

Hi-flex electric cables which were specially developed, optimised and tested for use in cable carriers can be found at

tsubaki-kabelschlepp.com/traxline.

Cable carrier configuration

Configuration guidelines

Materials information

QuickTrax® series


UNIFLEX Advanced series

TKP35 series

TKK series

ET0320 | Installation dim. | Unsupported · Gliding


Unsupported arrangement



KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
28	81.5	101.5	152	73
38	101.5	121.5	184	83
48	121.5	141.5	215	93
75	175.5	195.5	300	120
100	225.5	245.5	379	145
125	275.5	295.5	457	170

Load diagram for unsupported length depending on the additional load.

Intrinsic cable carrier weight $q_k = 0.40 \text{ kg/m}$ with B_i 38 mm. For other inner widths, the maximum additional load changes.





Speed up to 10 m/s



Acceleration up to $50 \,\mathrm{m/s^2}$




Travel length up to 2.9 m



Additional load up to 1.2 kg/m

Gliding arrangement





Speed up to 2.5 m/s

Travel length

up to 80 m







The gliding cable carrier must be guided in a channel. See p. 844.

Only design 030 can be used for a gliding arrangement.

Cable carrier configuration

Configuration guidelines

Materials information

ET0320.030 | Dimensions · Technical data

Stay variant 030 – with lamellae in the outer radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Outside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



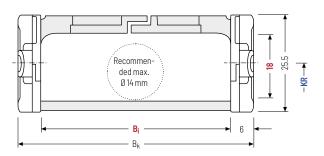

The maximum cable diameter strongly depends on the bending radius and the desired cable type.
Please contact us.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

 $\begin{array}{c} \text{Cable carrier length } L_k \\ \text{rounded to pitch } t \end{array}$

hi	hg					Bi						B_k							KR						q_k	
[mm]	[mm]				[mm]						[mm]						[r	nm	1]					[kg/m]	
18	25.5	15	-	25	-	38	-	50	-	65	-	$B_i + 12$	-	28	-	38	-	48	-	75	 100	-	125	1	0.35 - 0.45	

TKK series

UNIFLEX Advanced series

Order example



ET0320.040 | Dimensions · Technical data

Stay variant 040 - with lamellae in the inner radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Inside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



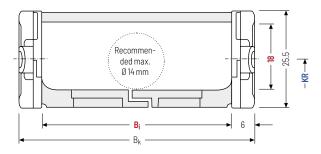

- The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.
- Design 040 is not suitable for gliding arrangements.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length Lk rounded to pitch t

hi	h _G					Bi			B _k				, l	(R				qk
[mm]	[mm]				[1	mm]			[mm]				[n	nm	1]			[kg/m]
18	25.5	15	-	25		38	50	65	$B_i + 12$	-	28	38	48		75	100	125	0.35 - 0.45

Order example



Cable carrier configuration

Configuration

ET0320 | Inner distribution | TS0

Divider systems


The divider system is mounted on every 2nd chain link as a

As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (version A).

Divider system TSO without height separation



The dividers can be moved in the cross section.



Order example



Please state the designation of the divider system (TSO), the version, and the number of dividers per cross section [n_T]. You are welcome to add a sketch to your order.

Additional product information online



Installation instructions, etc.: Additional info via your smartphone or check online at

tsubaki-kabelschlepp.com/ downloads



Configure your cable carrier here: online-engineer.de


TKK series


UNIFLEX Advanced series


subject to change without notice.


Single-part end connectors - plastic (with integrated strain relief)

The plastic end connectors can be **connected from above or below**. The connection type can be changed by altering the position of the end connector.










▲ Assembly options

B i [mm]	B EF [mm]	n _z
15	27	2
25	37	3
38	50	4
50	62	5
65	77	6



The end connectors are also available as an option **without** integrated strain relief. Please state when ordering.



Connection point

F - fixed point

M dainer

M - driver

Connection type


A - threaded joint outside (standard)

I - threaded joint inside

H - threaded joint, rotated 90° to the outside

K - threaded joint, rotated 90° to the inside

Order example



ET1455



Pitch 45.5 mm



Inner height 25 mm



Inner width 78 mm



Bending radii 52 - 200 mm

Stay variants



Design 030.....page **258**

Frame with lamellae in the outer radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Outside: swivelling.



Design 040.....page **259**

Frame with lamellae in the inner radius

- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side.
- » Inside: swivelling.



TOTALTRAX® complete systems

Benefit from the advantages of the TOTALTRAX® complete system. A complete delivery from one source - with a warranty certificate on request! Learn more at tsubaki-kabelschlepp.com/totaltrax



TRAXLINE® cables for cable carriers

Hi-flex electric cables which were specially developed, optimised and tested for use in cable carriers can be found at

tsubaki-kabelschlepp.com/traxline.

Cable carrier configuration

Configuration guidelines

Materials information

MONO series


QuickTrax® series

UNIFLEX Advanced series

> TKP35 series

ET1455 | Installation dim. | Unsupported · Gliding


Unsupported arrangement



KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
52	140	165	255	116
65	166	191	296	129
95	226	251	390	159
125	286	211	484	189
150	336	361	563	214
180	396	421	657	244
200	436	461	720	264

Load diagram for unsupported length depending on the additional load.

Intrinsic cable carrier weight $q_{\text{k}}\!=\!0.75\,\text{kg/m}$ with B_i 38 mm. For other inner widths, the maximum additional load changes.





Speed up to 10 m/s







Subject to change without notice.

:asyTrax[⊚] series

TKK series

ET1455.030 | Dimensions · Technical data

Stay variant 030 – with lamellae in the outer radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Outside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



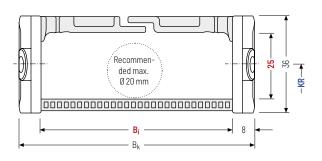

The maximum cable diameter strongly depends on the bending radius and the desired cable type.
Please contact us.

Calculating the cable carrier length

Cable carrier length Lk

$$L_k \approx \frac{L_S}{2} + L_B$$

 $\begin{array}{c} \text{Cable carrier length } L_k \\ \text{rounded to pitch } t \end{array}$

h _i [mm]	h _G [mm]	h g [,]		l [m	B_i nm]		B _k [mm]		-	(R nm]		q k [kg/m]
25	36	38.5	25	30	58	78	B _i + 16	52	65	95	125	0.65 - 0.80
20	00	00.0	23	30	30	70	י ום	150	180	200		0.00 - 0.00

Order example



Cable carrier

Cable carrier configuration

Configuration guidelines

Materials information

MUNU

JuickTrax[®] series

UNIFLEX Advanced series

> TKP35 series

TKK

ET1455.040 | Dimensions · Technical data

Stay variant 040 – with lamellae in the inner radius


- » Weight-optimised plastic frame with particularly high torsional rigidity.
- » Lamellae can be swivelled at any position on one side
- » Inside: swivelling.





Stay arrangement on each chain link (VS: fully-stayed)



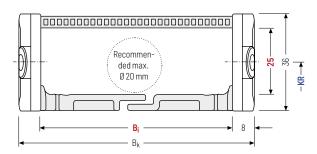

- The maximum cable diameter strongly depends on the bending radius and the desired cable type.
 Please contact us.
- Design 040 is not suitable for gliding arrangements.

Calculating the cable carrier length

Cable carrier length L_k

 $L_k \approx \frac{L_S}{2} + L_B$

Cable carrier length L_k rounded to pitch t

h _i [mm]	h _G [mm]	h _{G'}		E [m	3_i ım]		B _k [mm]		K [m	i R m]		q k [kg/m]
25	36	38.5	25	38	EO	78	B _i + 16	52	65	95	125	0.65 - 0.80
								150	180	200		0.05 - 0.00

Order example



Subject to change without notice.

asyTrax®

Cable carrier Cable carrier

Configuration guidelines

Materials information

MONO series

QuickTrax[®] series

UNIFLEX Advanced series

> TKP35 series

TKK

Cable carrier configuration

Configuration guidelines

Materials information

10N0 eries


UNIFLEX Advanced series

TKP35 series


ET1455 | End connectors

Single-part end connectors - plastic

The plastic end connectors can be connected from above or below. The connection type can be changed by altering the position of the end connector.



▲ Assembly options




Recommended tightening torque: 6 Nm for screws M6 - 8.8

B i [mm]	n _z
25	2×2
38	2x3
58	2 x 4
78	2 x 6



The end connectors are optionally also available without strain relief comb. Please state when orderina.



Connection point

F - fixed point

M - driver

Connection type

A - threaded joint outside (standard)

threaded joint inside

H - threaded joint, rotated 90° to the outside

K - threaded joint, rotated 90° to the inside

Order example



TKK series

TKK series

EasyTrax[®] series

