




# DES PDM M



## Round cable entry plates with internal frame and double membrane

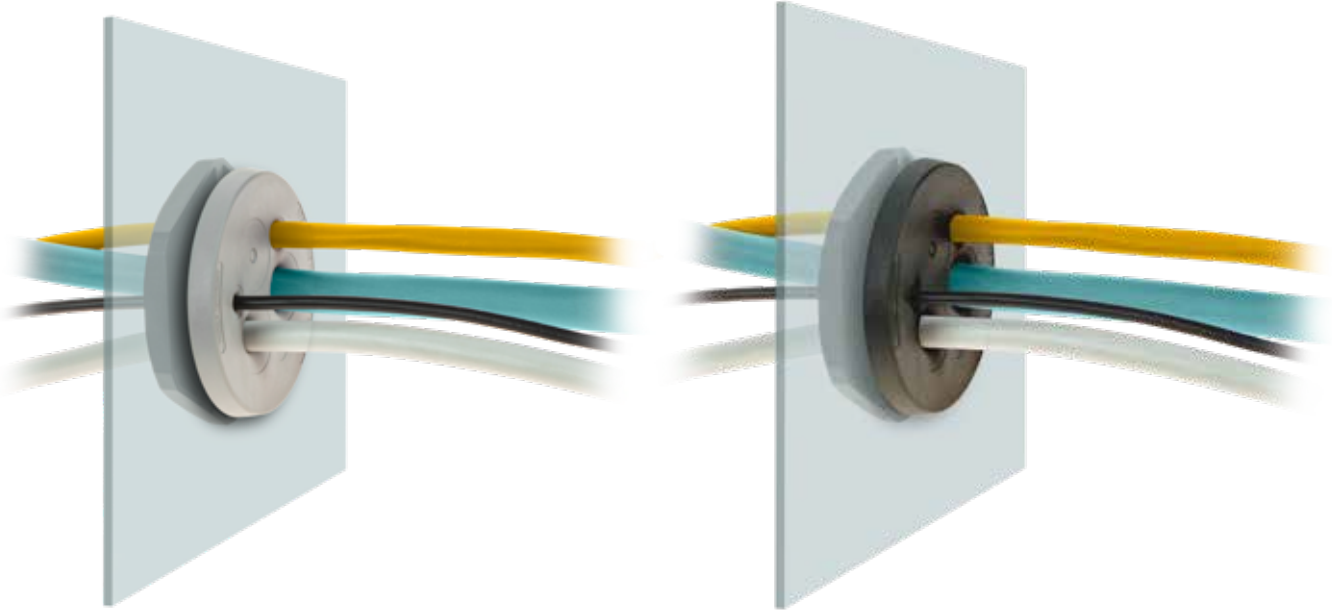

### FEATURES

- For large number of cables without connectors
- High strain relief thanks to the double membrane
- Cost efficient solution
- High IP grade IP66-68 Nema 4X\*
- ATEX version on request (Group 7)

The cable entry plates series DES PDM M are used to save space and time as alternative to cable glands. They use the metric holes on cabinets or machinery and the nutlock guarantees a strong strain relief and highest water and dust protection. The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

**NC: Number of cables**  
**ØC: Diameter of cables - min/max (mm)**

Model	Code		
● DES PDM M20/2G	1732032002		
● DES PDM M20/2B	1732033002		
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M20	36	7	10
	NC	ØC	
	2	2 / 5,5	

Model	Code		
● DES PDM M20/3G	1732032003		
● DES PDM M20/3B	1732033003		
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M20	36	7	10
	NC	ØC	
	3	2 / 5	

Model	Code		
● DES PDM M20/4G	1732032004		
● DES PDM M20/4B	1732033004		
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M20	36	7	10
	NC	ØC	
	4	2 / 4,5	

Model	Code		
● DES PDM M25/4G	1732032504		
● DES PDM M25/4B	1732033504		
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M25	41	7	10
	NC	ØC	
	3	2,6 / 6,5	
	1	5,5 / 12,5	

\* Indoor only



IP66  
IP68

NEMA  
12, 4X\*

UL TYPE  
12, 4X



ECOLAB



RoHS  
COMPLIANT





# DES PDM M



## Round cable entry plates with internal frame and double membrane

**Material:** TPE, halogens and silicones free

**Flammability:** self-extinguishing

acc. to UL94-V0

**Temperature:** -40°C... +105°C (static)

### RELATED PRODUCTS

- IFP plugs (page 97)
- HY360 hydraulic punch driver (page 148)



Model	Code
● DES PDM M25/6G	1732032506
● DES PDM M25/6B	1732033507

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M25	41	7	10

NC	ØC
6	2,2 / 5

Model	Code
● DES PDM M32/4G	1732033204
● DES PDM M32/4B	1732034205

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M32	46	7	10

NC	ØC
3	2,6 / 6,5
1	5,5 / 12,5

Model	Code
● DES PDM M32/4-2G	1732033242
● DES PDM M32/4-2B	1732034252

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M32	46	7	10

NC	ØC
4	3,5 / 8,8

Model	Code
● DES PDM M32/7G	1732033207
● DES PDM M32/7B	1732034208

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M32	46	7	10

NC	ØC
7	2,6 / 6,5

Model	Code
● DES PDM M40/8G	1732034008
● DES PDM M40/8B	1732035009

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M40	54	7	10

NC	ØC
4	2,6 / 6,5
4	4 / 10,2

Model	Code
● DES PDM M40/12G	1732034012
● DES PDM M40/12B	1732034013

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M40	54	7	10

NC	ØC
12	2 / 6

Model	Code
● DES PDM M50/8G	1732035008
● DES PDM M50/8B	1732036009

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M50	64	8,5	10

NC	ØC
5	4,6 / 10,2
3	6,8 / 12,5

Model	Code
● DES PDM M50/10G	1732035010
● DES PDM M50/10B	1732036011

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M50	64	8,5	10

NC	ØC
7	2,8 / 6,5
2	4,6 / 10,2
1	14,5 / 22

Model	Code
● DES PDM M50/12G	1732035012
● DES PDM M50/12B	1732036013

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M50	64	8,5	10

NC	ØC
4	2,8 / 6,5
8	4,6 / 10,2

Model	Code
● DES PDM M50/19G	1732035019
● DES PDM M50/19B	1732036020

M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M50	64	8,5	10

NC	ØC
19	2,8 / 6,5



IP66  
IP68

NEMA  
12, 4X\*

UL TYPE  
12, 4X



ECOLAB





# DES PDM M



## Round cable entry plates with internal frame and double membrane

Model		Code	
●	DES PDM M63/6G	1732036306	
●	DES PDM M63/6B	1732037307	
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M63	77	8,5	10
		<b>NC</b>	<b>ØC</b>
		3	4,6 / 10,2
		3	10,9 / 20


Model		Code	
●	DES PDM M63/9G	1732036309	
●	DES PDM M63/9B	1732037310	
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M63	77	8,5	10
		<b>NC</b>	<b>ØC</b>
		1	2,6 / 6
		3	4,6 / 10,2
		4	8,6 / 16,2
		1	10,9 / 20

Model		Code	
●	DES PDM M63/13G	1732036313	
●	DES PDM M63/13B	1732037314	
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M63	77	8,5	10
		<b>NC</b>	<b>ØC</b>
		4	2,8 / 6
		4	4,6 / 10,2
		5	9,5 / 16,2



Model		Code	
●	DES PDM M63/14G	1732036314	
●	DES PDM M63/14B	1732037315	
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M63	77	8,5	10
		<b>NC</b>	<b>ØC</b>
		14	5 / 10

Model		Code	
●	DES PDM M63/35G	1732036335	
●	DES PDM M63/35B	1732037336	
M x 1,5	ØP (mm)	H (mm)	Pcs/pack
M63	77	8,5	10
		<b>NC</b>	<b>ØC</b>
		35	2,6 / 5,5

Double parallel membrane

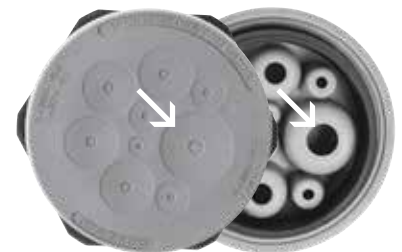

### Dimensions (mm)



Recommended tightening torque 8 Nm