



# DES PDMU



## Round cable entry plates for single cable

### FEATURES

- Metric sized
- Cost efficient solution
- High IP grade IP66 Nema 4X\*
- Recommended tightening torque 8 Nm
- ATEX version on request (Group 7)

The cable entry plates DES PDMU are used to save space and time as alternative to cable glands. They use the metric holes on cabinets or panels and the double membrane ensures a high water and dust protection.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

**Material:** TPE, halogens and silicones free

**Flammability:** self-extinguishing acc. UL94-V0

**Temperature:** -40°C... +110°C (static)

### PRODOTTI CORRELATI

- IFP plugs (page 97)
- HY360 hydraulic punch driver (page 148)

Double parallel membrane




\* Indoor only



Model	Code	Nr. Cables	Ø max (mm)	Thread	Dimensions (mm)		Pcs (/pack)
					Cut-out	Plate	
DES PDMU 20G	1732030120	1	10,5	M20	20,5	36	10
DES PDMU 25G	1732030125	1	16	M25	25,5	40	
DES PDMU 32G	1732030132	1	22	M32	32,5	46	
<b>NEW</b> DES PDMU 50G	1732030150	1	36	M50	50,5	64	10
DES PDMU 20B	1732031120	1	10,5	M20	20,5	36	
DES PDMU 25B	1732031125	1	16	M25	25,5	40	
DES PDMU 32B	1732031132	1	22	M32	32,5	46	10
<b>NEW</b> DES PDMU 50B	1732030152	1	36	M50	50,5	64	

### Dimensions (mm)

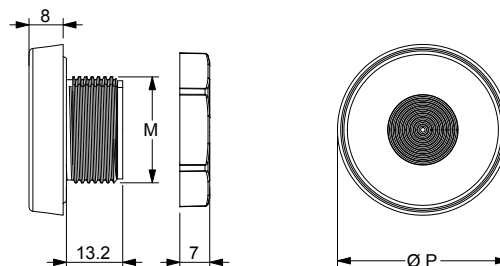

IP66

NEMA 12, 4X\*

UL TYPE 12, 4X



ECOLAB



RoHS COMPLIANT

